

CATÁLOGO
ILUMINACIÓN LED



HOGAR / INDUSTRIA / VÍA PÚBLICA



 WWW.KIAR.COM.AR



KIAR

CONOCÉ NUESTRA FAMILIA DE PRODUCTOS
ILUMINACIÓN LED



ILUMINANDO TUS BUENOS MOMENTOS...



Somos una empresa con visión de futuro, un futuro que ya llegó. Por eso trabajamos para ofrecer los mejores productos de iluminación tanto como para hogar, oficina, industria y vía pública.



ECOLOGÍA Y MEDIO AMBIENTE

Los dispositivos LED no contienen mercurio (*las bombillas normales contienen tungsteno y los fluorescentes mercurio, ambos productos tóxicos*). Esto hace que su proceso de reciclado sea más sencillo y respetuoso con el medioambiente.



AHORRO

Al instalar iluminación LED su consumo puede reducirse entre un 30 y un 75%, aunque esta no es su única ventaja: esta tecnología alarga la vida útil de las instalaciones eléctricas y abarata su mantenimiento.



VIDA ÚTIL

Las luminarias LED tienen una vida útil de 30.000 horas (*frente a las 2.000 horas de una bombilla estándar*). Su larga vida útil repercute en un ahorro sustancial en gastos y esfuerzos de mantenimiento.



APLICACIONES

La tecnología LED se adapta perfectamente a nuestras necesidades.



LÍNEA HOGAR



BULBO LED

KBL



W	LUMENS	VOLTAJE	FRECUENCIA	ÁNGULO	TEMP. COLOR	VIDA ÚTIL	ROSCA	DIMENSIONES
5w	450 Lm	220-240V	50~60hz	270°	4000 / 6500K	20.000 hs	E27	50 x 87 mm
7w	630 Lm	220-240V	50~60hz	270°	4000 / 6500K	20.000 hs	E27	60 x 113 mm
9w	810 Lm	220-240V	50~60hz	270°	4000 / 6500K	20.000 hs	E27	60 x 113 mm
12w	1080 Lm	220-240V	50~60hz	270°	4000 / 6500K	20.000 hs	E27	60 x 119 mm
15w	1350 Lm	220-240V	50~60hz	270°	4000 / 6500K	20.000 hs	E27	70 x 118 mm

		
5w	11w	40w
7w	15w	60w
9w	18w	70w
12w	25w	100w
15w	40w	120w

BULBO LED // PREMIUM

A60



W	LUMENS	VOLTAJE	FRECUENCIA	ÁNGULO	TEMP. COLOR	VIDA ÚTIL	ROSCA	DIMENSIONES
7w	630 Lm	220-240V	50~60hz	270°	4000 / 6500K	25.000 hs	E27	60 x 112mm
9w	810 Lm	220-240V	50~60hz	270°	4000 / 6500K	25.000 hs	E27	60 x 112mm
11w	1000 Lm	220-240V	50~60hz	270°	4000 / 6500K	25.000 hs	E27	60 x 112mm
15w	1350 Lm	220-240V	50~60hz	270°	4000 / 6500K	25.000 hs	E27	70 x 130mm

		
7w	15w	60w
9w	18w	70w
11w	22w	90w
15w	40w	120w



OVAL LED

W	LUMENS	VOLTAJE	FRECUENCIA	ÁNGULO	TEMP. COLOR	VIDA ÚTIL	ROSCA	DIMENSIONES
12w	1080 Lm	AC85-265V	50~60hz	180°	4000 / 6500K	30.000 hs	E27 / E40	58 x 145 mm
20w	1800 Lm	AC85-265V	50~60hz	180°	4000 / 6500K	30.000 hs	E27 / E40	75 x 118 mm
30w	2700 Lm	AC85-265V	50~60hz	180°	4000 / 6500K	30.000 hs	E27 / E40	90 x 208 mm
40w	3600 Lm	AC85-265V	50~60hz	180°	4000 / 6500K	30.000 hs	E27 / E40	105 x 238 mm

KEL

12w	25w	100w
12w	25w	100w
20w	60w	150w
30w	80w	250w
40w	100w	325w



TUBULAR LED

W	LUMENS	VOLTAJE	FRECUENCIA	ÁNGULO	TEMP. COLOR	VIDA ÚTIL	ROSCA	DIMENSIONES
6w	540 Lm	220-240V	50~60hz	180°	4000 / 6500K	20.000 hs	E27	37 x 121mm
9w	810 Lm	220-240V	50~60hz	180°	4000 / 6500K	20.000 hs	E27	37 x 121mm
15w	1350 Lm	220-240V	50~60hz	180°	4000 / 6500K	20.000 hs	E27	45 x 140mm

KTL

6w	13w	50w
6w	13w	50w
9w	18w	70w
15w	40w	120w

VELA LED

C37



WATS	LUMENS	VOLTAJE	FRECUENCIA	ÁNGULO	TEMP. COLOR	VIDA ÚTIL	ROSCA	DIMENSIONES
4w	360 Lm	220-240V	50~60hz	270°	4000 / 6500K	25.000 hs	E14 / E27	37 x 100 mm
6w	450 Lm	220-240V	50~60hz	270°	4000 / 6500K	25.000 hs	E14 / E27	37 x 100 mm

4w	9w	38w
6w	13w	50w

DICROICA LED

C37



WATS	LUMENS	VOLTAJE	FRECUENCIA	ÁNGULO	TEMP. COLOR	VIDA ÚTIL	ROSCA	DIMENSIONES
5w	400 Lm	220-240V	50~60hz	120°	4000 / 6500K	25.000 hs	GU10	50 x 55 mm
7w	540 Lm	220-240V	50~60hz	120°	4000 / 6500K	25.000 hs	GU10	50 x 55 mm

5w	8w	38w
6w	9w	45w

SAVING LED



W	LUMENS	VOLTAJE	FRECUENCIA	ÁNGULO	TEMP. COLOR	VIDA ÚTIL	ROSCA	DIMENSIONES
5w	450 Lm	AC85-265V	50~60hz	260°	4000 / 6500K	30.000 hs	E27	40 x 120 mm
9w	810 Lm	AC85-265V	50~60hz	260°	4000 / 6500K	30.000 hs	E27	50 x 135 mm
12w	1080 Lm	AC85-265V	50~60hz	260°	4000 / 6500K	30.000 hs	E27	55 x 185 mm
16w	1440 Lm	AC85-265V	50~60hz	260°	4000 / 6500K	30.000 hs	E27	60 x 185 mm
24w	2160 Lm	AC85-265V	50~60hz	260°	4000 / 6500K	30.000 hs	E27	75 x 260 mm

ESL SMD

W	LUMENS	VOLTAJE	FRECUENCIA	ÁNGULO	TEMP. COLOR	VIDA ÚTIL	ROSCA	DIMENSIONES
5w	450 Lm	AC85-265V	50~60hz	260°	4000 / 6500K	30.000 hs	E27	40 x 120 mm
11w	810 Lm	AC85-265V	50~60hz	260°	4000 / 6500K	30.000 hs	E27	50 x 135 mm
40w	1080 Lm	AC85-265V	50~60hz	260°	4000 / 6500K	30.000 hs	E27	55 x 185 mm
18w	1440 Lm	AC85-265V	50~60hz	260°	4000 / 6500K	30.000 hs	E27	60 x 185 mm
70w	2160 Lm	AC85-265V	50~60hz	260°	4000 / 6500K	30.000 hs	E27	75 x 260 mm

FILAMENTO LED



W	LUMENS	VOLTAJE	FRECUENCIA	ÁNGULO	TEMP. COLOR	VIDA ÚTIL	ROSCA	DIMENSIONES
2w	180 Lm	AC220-240V	50~60hz	360°	3500K	30.000 hs	E27	55 x 90 mm
6w	540 Lm	AC220-240V	50~60hz	360°	3500K	30.000 hs	E27	55 x 90 mm
8w	720 Lm	AC220-240V	50~60hz	360°	3500K	30.000 hs	E27	55 x 90 mm

WS QP

W	LUMENS	VOLTAJE	FRECUENCIA	ÁNGULO	TEMP. COLOR	VIDA ÚTIL	ROSCA	DIMENSIONES
2w	180 Lm	AC220-240V	50~60hz	360°	3500K	30.000 hs	E27	55 x 90 mm
6w	540 Lm	AC220-240V	50~60hz	360°	3500K	30.000 hs	E27	55 x 90 mm
20w	720 Lm	AC220-240V	50~60hz	360°	3500K	30.000 hs	E27	55 x 90 mm
13w	1080 Lm	AC220-240V	50~60hz	360°	3500K	30.000 hs	E27	55 x 90 mm
50w	1440 Lm	AC220-240V	50~60hz	360°	3500K	30.000 hs	E27	55 x 90 mm

LÍNEA DE

PANELES LED

KIAR

Simpleza y diseño
en tus espacios.

6500K
4000K

AHORRA
75%



PANEL LED // ALUMINIUM

PLS

W	LUMENS	VOLTAJE	FRECUENCIA	ÁNGULO	TEMP. COLOR	VIDA ÚTIL	DIMENSIONES			
48w	4320 Lm	220-240V	50~60hz	180°	4000 / 6500K	30.000 hs	600 x 600 mm	48w	108w	415w
60w	5400 Lm	220-240V	50~60hz	180°	4000 / 6500K	30.000 hs	600 x 600 mm	60w	135w	540w

PANEL LED // RECTANGLE

PLH

W	LUMENS	VOLTAJE	FRECUENCIA	ÁNGULO	TEMP. COLOR	VIDA ÚTIL	DIMENSIONES			
48w	4320 Lm	220-240V	50~60hz	180°	4000 / 6500K	30.000 hs	300 x 600 mm	48w	108w	415w
60w	5400 Lm	220-240V	50~60hz	180°	4000 / 6500K	30.000 hs	300 x 600 mm	60w	135w	540w
72w	6480 Lm	220-240V	50~60hz	180°	4000 / 6500K	30.000 hs	120 x 600 mm	72w	162w	650w


PANEL LED // WHITE CIRCLE

PLG



W	L	V	F	Á	T	V	D
WATS	LUMENS	VOLTAJE	FRECUENCIA	ÁNGULO	TEMP. COLOR	VIDA ÚTIL	DIMENSIONES
9w	810 Lm	220-240V	50~60hz	180°	4000 / 6500K	30.000 hs	A:145 B:130 C:20mm
12w	1080 Lm	220-240V	50~60hz	180°	4000 / 6500K	30.000 hs	A:174 B:155 C:20mm
18w	1620 Lm	220-240V	50~60hz	180°	4000 / 6500K	30.000 hs	A:225 B:210 C:20mm
24w	2160 Lm	220-240V	50~60hz	180°	4000 / 6500K	30.000 hs	A:300 B:285 C:20mm

9w	18w	70w
12w	25w	100w
18w	50w	140w
24w	65w	175w



PANEL LED // WHITE

PLR



W	L	V	F	Á	T	V	D
WATS	LUMENS	VOLTAJE	FRECUENCIA	ÁNGULO	TEMP. COLOR	VIDA ÚTIL	DIMENSIONES
9w	810 Lm	220-240V	50~60hz	180°	4000 / 6500K	30.000 hs	A:145 B:130 C:20mm
12w	1080 Lm	220-240V	50~60hz	180°	4000 / 6500K	30.000 hs	A:174 B:155 C:20mm
18w	1620 Lm	220-240V	50~60hz	180°	4000 / 6500K	30.000 hs	A:225 B:210 C:20mm
24w	2160 Lm	220-240V	50~60hz	180°	4000 / 6500K	30.000 hs	A:300 B:285 C:20mm

9w	18w	70w
12w	25w	100w
18w	50w	140w
24w	65w	175w

The advertisement features a collage of industrial lighting products and a warehouse scene. On the left, a large, detailed image of a hanging industrial lamp with a ribbed, cylindrical body and a wide, conical shade is shown. The top right corner contains two smaller images: one of a dome-shaped light fixture and another of a square light fixture. The bottom right corner shows a close-up of a light fixture with a yellow LED chip. The central background image is a wide-angle shot of a large industrial warehouse with a high, steel-truss ceiling and a yellow forklift in the foreground. A green banner with the text 'LÍNEA INDUSTRIAL' is positioned across the top left.

LÍNEA INDUSTRIAL


LÁMPARA // INDUSTRIAL

KFP



W	LUMENS	VOLTAJE	FRECUENCIA	ÁNGULO	TEMP. COLOR	VIDA ÚTIL	ROSCA	DIMENSIONES
28w	2520 Lm	220-240V	50~60hz	180°	6500K	20.000 hs	E27 / 40	100 x 186 mm
50w	4500 Lm	220-240V	50~60hz	180°	6500K	20.000 hs	E27 / 40	125 x 237 mm

28w	85w	250w
50w	120w	430w

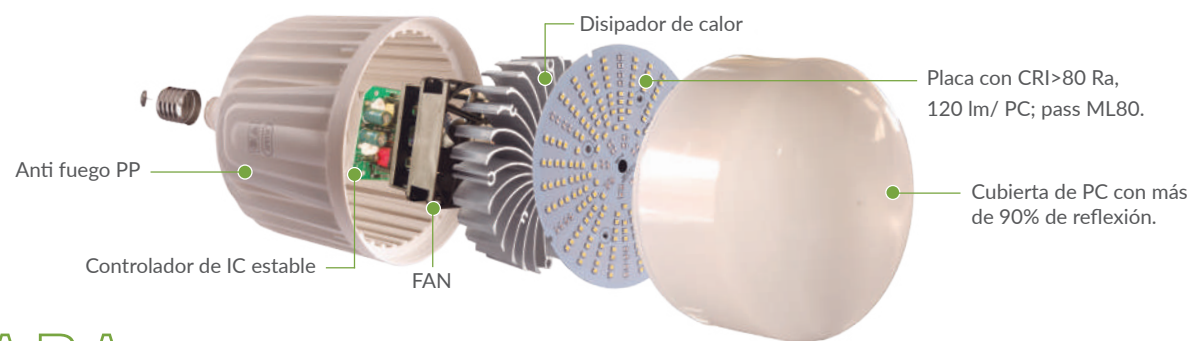

LÁMPARA // INDUSTRIAL

KFP

ADICIONALES:



W	LUMENS	VOLTAJE	FRECUENCIA	ÁNGULO	TEMP. COLOR	VIDA ÚTIL	ROSCA	DIMENSIONES
80w	7200 Lm	220-240V	50~60hz	180°	6500K	20.000 hs	E40	142 x 296 mm
100w	9100 Lm	220-240V	50~60hz	180°	6500K	20.000 hs	E40	142 x 296 mm
150w	13500 Lm	220-240V	50~60hz	180°	6500K	20.000 hs	E40	160 x 323 mm
200w	18000 Lm	220-240V	50~60hz	180°	6500K	20.000 hs	E40	160 x 323 mm

80w	220w	700w
100w	280w	900w
150w	350w	1100w
200w	500w	1450w



REFLECTORES LED

TG J

W	LUMENS	VOLTAJE	FRECUENCIA	ÁNGULO	TEMP. COLOR	VIDA ÚTIL	PROTECCIÓN	DIMENSIONES
30w	2700 Lm	AC85-265V	50~60hz	260°	6500K	30.000 hs	IP65	205 x 165 mm
50w	4500 Lm	AC85-265V	50~60hz	260°	6500K	30.000 hs	IP65	250 x 200 mm
70w	6300 Lm	AC85-265V	50~60hz	260°	6500K	30.000 hs	IP65	300 x 220 mm
100w	9000 Lm	AC85-265V	50~60hz	260°	6500K	30.000 hs	IP65	375 x 235 mm
150w	13500 Lm	AC85-265V	50~60hz	260°	6500K	30.000 hs	IP65	515 x 235 mm

		
30w	75w	280w
50w	120w	430w
70w	200w	650w
100w	280w	900w
150w	370w	1100w



REFLECTORES
LED

30 a 150w ☀



LAMPARA LED // COLGANTE

KD-B

W	L	V	F	Á	T	V	P	D
WATS	LUMENS	VOLTAJE	FRECUENCIA	ÁNGULO	TEMP. COLOR	VIDA ÚTIL	PROTECCIÓN	DIMENSIONES
40w	7200 Lm	AC85-265V	50~60hz	90°	6500K	30.000 hs	IP65	145 x 180mm

W	L	V
WATS	LUMENS	VOLTAJE
40w	100w	325w



LAMPARA LED // COLGANTE

KD-C

W	L	V	F	Á	T	V	P	D
WATS	LUMENS	VOLTAJE	FRECUENCIA	ÁNGULO	TEMP. COLOR	VIDA ÚTIL	PROTECCIÓN	DIMENSIONES
80w	7200 Lm	AC85-265V	50~60hz	120°	6500K	30.000 hs	IP65	180 x 200mm
120w	10800 Lm	AC85-265V	50~60hz	120°	6500K	30.000 hs	IP65	235 x 290mm
150w	13500 Lm	AC85-265V	50~60hz	120°	6500K	30.000 hs	IP65	235 x 320mm
200w	18000 Lm	AC85-265V	50~60hz	120°	6500K	30.000 hs	IP65	235 x 360mm

W	L	V
WATS	LUMENS	VOLTAJE
80w	220w	700w
120w	300w	950w
150w	350w	1100w
200w	500w	1450w




LED



LÍNEA VÍA PÚBLICA



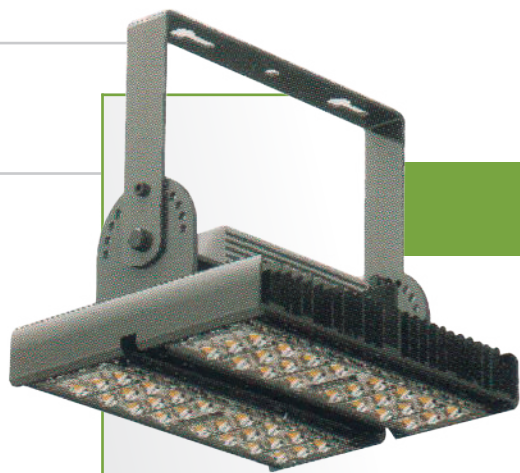

TUNNEL LIGHT LED

FRX SD B

W	LUMENS	VOLTAJE	FRECUENCIA	ÁNGULO	TEMP. COLOR	VIDA ÚTIL	PROTECCIÓN	DIMENSIONES
60w	5400 Lm	AC85-265V	50~60hz	180°	6500K	30.000 hs	IP65	297x230x145mm
90w	8100 Lm	AC85-265V	50~60hz	180°	6500K	30.000 hs	IP65	340x298x145mm
120w	10800 Lm	AC85-265V	50~60hz	180°	6500K	30.000 hs	IP65	430x298x145mm
180w	16200 Lm	AC85-265V	50~60hz	180°	6500K	30.000 hs	IP65	596x345x145mm



60w	170w
90w	240w
120w	300w
180w	470w



STREET LED

FRX SL D

W	LUMENS	VOLTAJE	FRECUENCIA	ÁNGULO	TEMP. COLOR	VIDA ÚTIL	PROTECCIÓN	DIMENSIONES
30w	2700 Lm	AC85-265V	50~60hz	180°	6500K	30.000 hs	IP65	530x240x235mm
50w	4500 Lm	AC85-265V	50~60hz	180°	6500K	30.000 hs	IP65	740x350x235mm
80w	7200 Lm	AC85-265V	50~60hz	180°	6500K	30.000 hs	IP65	675x330x245mm



30w	75w
50w	120w
80w	220w



STREET LED

FRX SL I

W	LUMENS	VOLTAJE	FRECUENCIA	ÁNGULO	TEMP. COLOR	VIDA ÚTIL	PROTECCIÓN	DIMENSIONES
50w	4500 Lm	AC85-265V	50~60hz	180°	6500K	30.000 hs	IP65	639x250x126mm
100w	9000 Lm	AC85-265V	50~60hz	180°	6500K	30.000 hs	IP65	740x255x122mm
240w	21600 Lm	AC85-265V	50~60hz	180°	6500K	30.000 hs	IP65	1050x320x130mm



50w	120w
100w	280w
240w	580w



STREET LED

FRX SL F

W	LUMENS	VOLTAJE	FRECUENCIA	ÁNGULO	TEMP. COLOR	VIDA ÚTIL	PROTECCIÓN	DIMENSIONES
50w	4500 Lm	AC85-265V	50~60hz	180°	6500K	30.000 hs	IP65	650x236x117mm
60w	5400 Lm	AC85-265V	50~60hz	180°	6500K	30.000 hs	IP65	650x236x117mm
80w	7200 Lm	AC85-265V	50~60hz	180°	6500K	30.000 hs	IP65	650x236x117mm
100w	9000 Lm	AC85-265V	50~60hz	180°	6500K	30.000 hs	IP65	800x291x132mm
120w	10800 Lm	AC85-265V	50~60hz	180°	6500K	30.000 hs	IP65	800x291x132mm
150w	13500 Lm	AC85-265V	50~60hz	180°	6500K	30.000 hs	IP65	950x364x155mm
180w	16200 Lm	AC85-265V	50~60hz	180°	6500K	30.000 hs	IP65	950x364x155mm



50w	120w
60w	170w
80w	220w
100w	280w
120w	300w
150w	350w
180w	470w



BULBO KBL



BULBO
PREMIUM KBL



OVAL LED KEL



TUBULAR LED KEL



VELA LED C37



DICROICA LED C37



SAVING LED ESL SMD



FILAMENTO LED WS QP



PANEL LED
ALUMINIUM PLS



PANEL LED
WHITE PLR



PANEL LED
WHITE CIRCLE PLG



PANEL LED
WHITE PLH



LAMPARA INDUSTRIAL
KFP · E40



LAMPARA INDUSTRIAL
KFP · E27 / E40



REFLECTORES
LED TGJ



LAMPARA LED
COLGANTE KDB



LAMPARA LED
COLGANTE KDC



STREET LED
FRX SL I



STREET LED
FRX SL F



TUNEL LIGHT LED
FRX SD B



STREET LED
FRX SL D





siempre cerca en
tus buenos momentos...

WWW.KIAR.COM.AR
INFO@KIAR.COM.AR

